



E5000-Replacing the Packing

1

Remove the handle bolt.

2

Set handle, bolt, and draw straps off to the side.

3

Remove the packing nut (7).

4

DO NOT REMOVE OLD PACKING. Doing so can damage the threads.

5

Take your packing and cut a 1/3 off.

6

Take the small piece of packing and place in the packing nut hole.

7

Replace the packing nut (7) and tighten it down.

8

Place the lower adjusting nut in the spot that you marked. Add pivot connector and upper adjusting nut.

9


Attach draw straps, handle, and handle bolt.

10

Lift and lower the handle a few times.

11

If the leak is still present, repeat the previous steps and add another 1/3 portion of the packing.

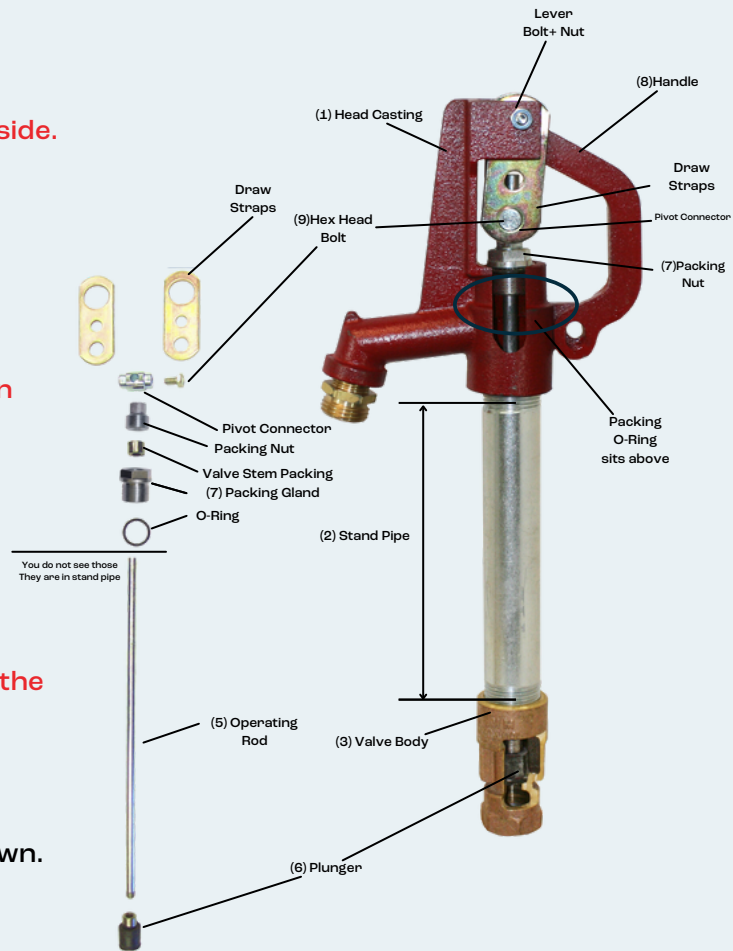

Tools Needed

Wrenches

- 1x 7/16 for the handle nuts
- 2x 9/16 for the adjusting nuts



Vice-Grips



Click [HERE](#) to find YouTube Videos

Questions? 712-454-7966