

# MA SERIES FROST PROOF WALL FAUCETS

## SPECIFICATIONS:

- Model "D" end connection includes 1/2" MIP and 1/2" copper sweat connections, providing versatile installation options.
- Model "T" end connection features a 3/4" MIP and 1/2" FIP double thread.
- An adjustable packing nut with rubber packing replaces asbestos packing used by other companies, ensuring a safer and more reliable seal.
- The metal handle provides strength and durability for long-lasting performance.
- The end connection design allows for easy installation without oversized holes in walls.
- A stamp on the inlet end of the wall faucet indicates the outlet direction on the building's exteriors, simplifying connection when installing from the interior.
- A chrome-plated finish provides corrosion protection while enhancing the faucet's overall appearance.
- An anti-siphon design includes dual safety features, such as air checks at the nozzle and shut-off end connections, preventing backflow.
- When shut off, the wall faucet drains automatically, including the open-end hose, due to the air check above the nozzle.
- **NOTE:** The wall faucet must be installed with a downward slope from the inlet to the outlet to ensure proper drainage. Also, the hose must not have a shut-off valve at the end or it must be removed, allowing the faucet to drain completely.

## RATINGS

- Max Pressure: 250 PSI
- Min Operating Temp: 32°F
- Max Operating Temp: 180°F

## CERTIFICATIONS:

- IAPMO CA. Certified
- ASSE-1019A
- CSA
- UPC
- E.A.




No Lead



C.A. Certified



**WARNING: WARRANTY VOID** if not installed with downward pitch to prevent freezing.

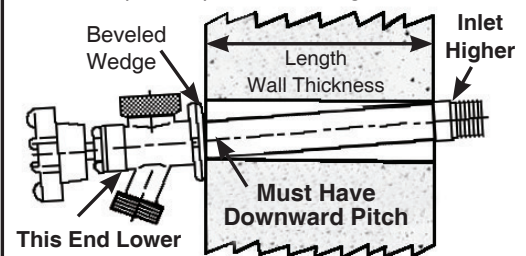

## MATERIALS LIST

Part Name	Material
Beveled Wedge	Polyoxymethylene
Handle Screw	Brass
Handle Washer	Aluminum
Handle	Aluminum
Bonnet Nut	Brass (Chrome-Plated)
Packing Washer	304 Stainless Steel
Packing	NBR
Flat Washer	304 Stainless Steel
Spring	304 Stainless Steel
O-Ring	NBR
Seat	No-Lead Brass
Seat Packing	NBR
Seat Washer	Brass
Bibb Washer	NBR
Bibb Washer Screw	Brass
VB Cap	Brass (Chrome-Plated)
VB Plunger	Polyoxymethylene
VB Packing	NBR
VB O-Ring	NBR
VB Bonnet	Polyoxymethylene (POM-M90)
Body	Brass (Chrome-Plated)
Pipe	Brass (Copper Alloy)

## DIMENSIONS

Part No.	Size Length	L in.	W in.	H in.	Approx. Wt./Lbs.	Ctn. Qty.	Approx. Ctn. Wt./Lbs.
MAD4	4"	3.07	2.20	8.64	1.2	24	29.0
MAD6	6"	3.07	2.20	10.65	1.3	24	32.0
MAD8	8"	3.07	2.20	12.66	1.4	24	34.0
MAD10	10"	3.07	2.20	14.67	1.4	24	34.0
MAD12	12"	3.07	2.20	16.67	1.5	24	36.0
MAD14	14"	3.07	2.20	18.68	1.6	24	39.0
MAT12	12"	3.07	2.20	16.67	1.6	24	39.0
MADNL8	8"	3.07	2.20	12.66	1.4	24	34.0
MADNL10	10"	3.07	2.20	14.67	1.4	24	34.0
MADNL12	12"	3.07	2.20	16.67	1.5	24	36.0



315 Flindt Drive P.O. Box 392  
Storm Lake, Iowa 50588-0392 U.S.A.  
merrillmfg.com

(800) 831-6962  
(712) 732-2760  
Fax No. 1-800-ANYFLOW