



# PITLESS ADAPTERS – NO-LEAD BRASS (IMPORTED)

## SPECIFICATIONS:

- NPT threads conform to ANSI/ASME.
- Chamfer and tapers on both male and female parts for easy connection.
- Large gasket positive seal on inside and outside to well casing.
- Glued O-ring on male part of pitless does not fall off during installation.
- Custom molded gasket between collar and outside of casing to insure seal to well casing as well as pitless discharge.
- Extra wide no-lead brass nut to accommodate wrench for easier installation.



C.A. Certified

Listed PAS-97(2021)




## RATINGS:

- Max Pressure: 150 PSI
- Max Temperature: 180°F


## CERTIFICATIONS:

- NSF/ANSI Standard 372 Certified
- PAS-1 and PAS-97(2019)(R 2023)
- ASSE Standard #1093-2019(R 2023)
- IAPMO CA. Certified

### Built-In Installation Tool

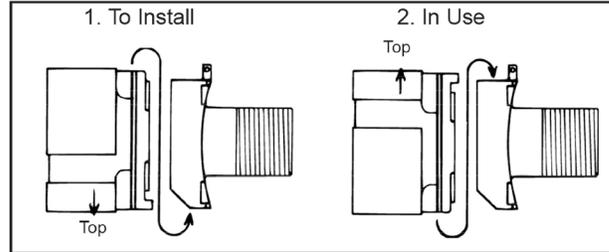

MATERIALS LIST	
Part Name	Material
Female Discharge	No Lead Brass
Male Elbow	No Lead Brass
Male O-Ring	Buna
Female O-Ring	Buna
Discharge Gasket	Buna
Female Collar	No Lead Brass
Female Nut	No Lead Brass

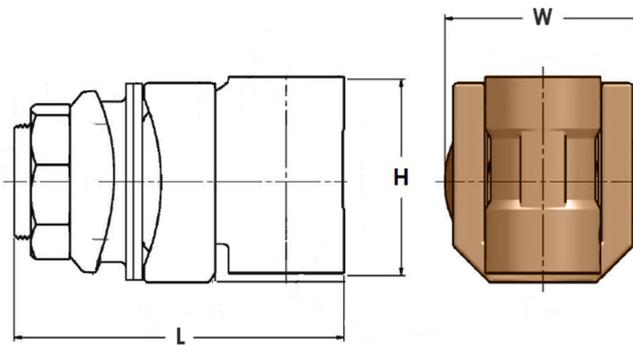

DIMENSIONS											
Part No.	Drop Pipe & Discharge	Discharge Length	Casing Sizes	Will Support	Hole Saw	Carton Qty.	Replacement Male O-Ring	Length (L)	Height (H)	Width (W)	Approx. Wt./Lbs.
MBNL50	1"	1.8" LM	5"-8"	300'	1-3/4"	4	OR222	4.10"	2.83"	3.02"	2.4
MBNL200	1"	1.8" LM	5"-8"	400'	1-3/4"	4	OR326	4.48"	2.78"	3.01"	2.8
MBNL225	1-1/4"	1.8" LM	5"-8"	300'	2-1/8"	2	OR326	4.80"	3.15"	3.57"	3.8

LM = Long Model



315 Flindt Drive P.O. Box 392  
Storm Lake, Iowa 50588-0392 U.S.A.  
merrillmfg.com

(800) 831-6962  
(712) 732-2760  
Fax No. 1-800-ANYFLOW