

PRESSURE RELIEF VALVES HEAVY-DUTY NO-LEAD BRASS

SPECIFICATIONS:

- Constructed from heavy-duty no-lead brass, these pressure relief valves are designed for durability and corrosion resistance, making them ideal for cold water systems.
- The valves feature a lubricated seal to prevent sticking and are preset at 75 psi with a $\pm 15\%$ setting accuracy.
- While not intended for use as temperature and pressure valves for water heaters, these valves are essential for protecting cold water pressure tanks and piping. The warranty is void if they are used on air systems.
- Repeated valve openings exceed the intended use and void the warranty. If the valve fails to reseat after relieving pressure, manual disassembly and reseating may be required.
- To prevent valve chatter or rapid opening and closing, set the valve at least 15 psi above the typical maximum system pressure. Chatter can cause valve failure and void the warranty.
- Even though these valves are field adjustable by removing the cap and turning the internal disk, any adjustments void the warranty due to the potential for errors. Custom factory adjustments are available upon request for an additional cost. Custom-set relief valves are non-cancelable, non-returnable, and recommended for water systems up to 150 psi only.




No Lead



APPROXIMATE RELIEF IN GPM FROM THE HEAVY-DUTY PRESSURE RELIEF VALVES					
Set PSI	3/4"	1"	1-1/4"	1-1/2"	2"
50	15	25	44	68	132 GPM
60	16	28	48	75	125 GPM
70	17	30	52	81	156 GPM
80	19	32	55	87	167 GPM
90	20	34	29	92	177 GPM
100	21	36	62	97	187 GPM
110	21	36	62	97	187 GPM
120	23	39	68	106	205 GPM
130	24	41	71	110	213 GPM

DIMENSIONS						
Part No.	Inlet x Outlet	L in.	W in.	H in.	Ctn. Qty.	Ctn. Wt./Lbs.
PRVHDNL75	3/4" x 3/4"	6.86	2.69	2.15	1	1.6
PRVHDNL100	1" x 1"	8.13	2.92	2.50	1	2.7
PRVHDNL125	1-1/4" x 1-1/4"	9.18	4.03	3.01	1	4.3
PRVHDNL150	1-1/2" x 1-1/2"	9.94	4.21	3.30	1	5.5
PRVHDNL200	2" x 2"	11.10	4.60	3.65	1	9.3

Pressure Relief Valves - Reflects 3/4" Valve

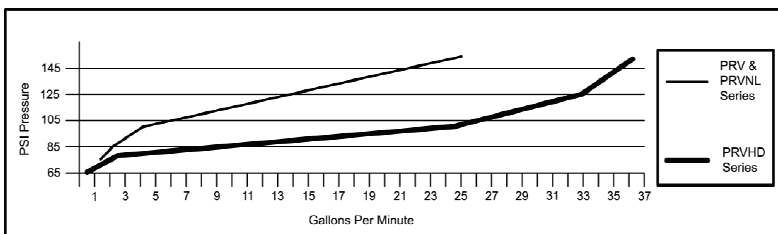

315 Flindt Drive P.O. Box 392
Storm Lake, Iowa 50588-0392 U.S.A.
merrillmfg.com

(800) 831-6962
(712) 732-2760
Fax No. 1-800-ANYFLOW