

1-1/4" STAINLESS STEEL TANK TEES

ALL 304 STAINLESS STEEL

SPECIFICATIONS:


- Tank tee connects the water line from the pump to the pressure tank plus all the extra tapings needed to complete installation.
- Several lengths available for use with various pressure tanks: 4-1/2", 5-1/2", 6", and 11".
- Several tank connections available: 1" MIP, 1" FIP, 1-1/4" MIP, 1-1/4" FIP.
- Other tapings provided: front drain hole (2) 1/2" FIP for 1" size tees and (2) 3/4" FIP for 1-1/4" size tees.
- Lateral connections for pipe to and from tank: 1-1/4" MIP and 1" FIP.
- All tank tees have two 1/4" FIP tapings on top of the tee, for pressure switch and pressure gauge.
- Tank tees are available as one piece, with O-ring union on tank leg or union as part of the tank connection nut.
- Long version tank tees available as all cast or fabricated with stainless steel pipe to give you the length needed.
- 12 different models of Stainless Steel Tank Tees for any model pressure tank or installation needs.



No Lead



C.A. Certified

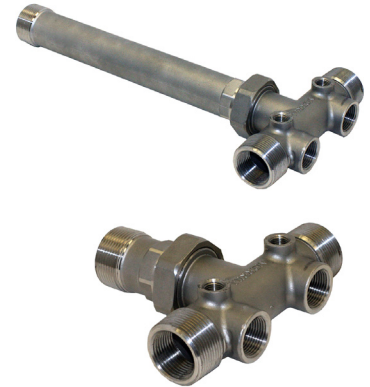

CERTIFICATIONS:

- IAPMO CA. Certified

MATERIALS LIST	
Part Name	Material
Tank Tee Body	304 Stainless Steel
O-Ring	NBR (Nitrile)

DIMENSIONS										
Part No.	Type	Tank Connection	Lateral	Drain Hole (Qty/Size)	L in.	W in.	H in.	O-Ring Size	Ctn. Qty.	Approx. Wt./Lbs.
SSAT1252UCS	CAST	1-1/4" MIP	1-1/4" MIP & 1" FIP	(2) 3/4"	5.61	6.17	2.38	OR220	4	2.6
SSAT1252XUC	CAST	1-1/4" MIP	1-1/4" MIP & 1" FIP	(2) 3/4"	14.2	5.93	2.35	OR220	2	4.1
SSAT1252S	CAST	1-1/4" MIP	1-1/4" MIP & 1" FIP	(2) 3/4"	5.48	6.18	1.90	N/A	4	2.1
SSAT1252	CAST	1-1/4" MIP	1-1/4" MIP & 1" FIP	(2) 3/4"	14.06	6.19	1.90	N/A	2	3.6
SSAT1252SF	FAB	1-1/4" FIP	1-1/4" MIP & 1" FIP	(2) 3/4"	6.59	6.21	1.90	N/A	4	2.9

Note: For leak proof threads with stainless steel, be sure to use Merrill AQUA-SEAL Thread Sealing Compound and PTFE-Tape with nickel.