

# HIDE-DRANT SERIES – STANDARD 3/4” HIDE-DRANT GALVANIZED STAND PIPE ONLY

## SPECIFICATIONS:

- Sanitary Yard Hydrant is approved for use in Illinois, Indiana, Michigan, Ohio, and Wisconsin—some of the most restrictive states in the United States.
- Frost proof when used correctly, simply turn the standpipe counter-clockwise three turns to disconnect the 3/4” NPT inlet from the bottom case stainless steel stop valve, then remove and drain the standpipe for freezing temperatures. No tools are required for removal or reinstallation.
- Stop valve at the bottom of the Hide-Drant automatically opens when the standpipe is reinstalled. Seals between the stainless steel stop valve and standpipe hold water before the valve is reopened.
- The 3/4” no-lead brass vacuum breaker outlet can be in any direction. By simply pivoting the outlet counter-clockwise to the desired direction, approximately three revolutions are needed to remove the standpipe. Do **NOT** overtighten the standpipe by forcing a clockwise revolution of the outlet.
- The 1-1/2” schedule 40 bottom case has a one way flapper drain to remove any spilled water inside the case, in addition to a cover over the drain on the outside to protect it from backfill.
- With a removable riser pipe, the bottom case can be capped off, allowing the grass to be mowed right over the top and it also improves appearance of landscape.
- ASSE approved vacuum breaker and outlet valve included.



No Lead



## RATINGS:


- Max Pressure: 80 PSI
- Maximum Temperature: 120°F

## CERTIFICATIONS:

- ASSE1011
- CSA B64.2.2 on BVBNL75M

MATERIALS LIST	
Part Name	Material
Inlet Bushing	Stainless Steel
Stop Valve	Stainless Steel
Stand Pipe	Galvanized Steel
Centering Collar	Plastic
Top Cap	Plastic
Boiler Drain (Optional)	No-Lead Brass
Vacuum Breaker with Manual Drain	No-Lead Brass

DIMENSIONS				
Part No.	Bury Depth	Overall Length	Width	Approx. Wt./Lbs.
HIDESPG201	1'	38.0"	12"	4.9
HIDESPG202	2'	50.0"	12"	6.0
HIDESPG203	3'	62.0"	12"	7.1
HIDESPG204	4'	74.0"	12"	8.2
HIDESPG205	5'	86.0"	12"	9.3
HIDESPG206	6'	98.0"	12"	10.4
HIDESPG207	7'	110.0"	12"	11.5
HIDESPG208	8'	122.0"	12"	12.6

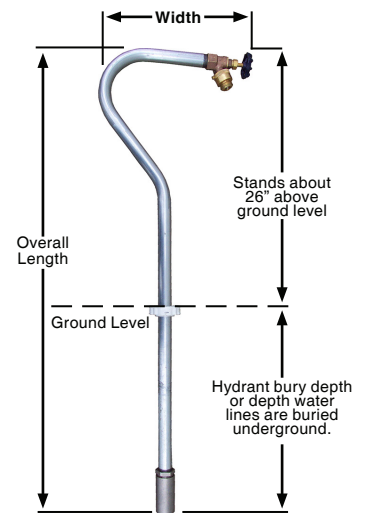

## APPROVED AS A SANITARY HYDRANT

Approved by states that require approval for sanitary hydrants, including: Illinois, Indiana, Michigan, Ohio, and Wisconsin.



315 Flindt Drive P.O. Box 392  
Storm Lake, Iowa 50588-0392 U.S.A.  
merrillmfg.com

(800) 831-6962  
(712) 732-2760  
Fax No. 1-800-ANYFLOW