

# HIDE-DRANT SERIES – STRAIGHT ALL PVC 3/4” INLET

## SPECIFICATIONS:

- Sanitary Yard Hydrant is approved for use in Illinois, Indiana, Michigan, Ohio, and Wisconsin—some of the most restrictive states in the United States.
- Frost proof when used correctly, simply turn the standpipe counter-clockwise three turns to disconnect the 3/4” NPT inlet from the bottom case PVC stop valve, then remove and drain the standpipe for freezing temperatures. No tools are required for removal or reinstallation.
- Stop valve at the bottom of the Hide-Drant automatically opens when the standpipe is reinstalled. Seals between the PVC stop valve and standpipe hold water before the valve is reopened.
- The 1-1/2” schedule 40 bottom case has a one way flapper drain to remove any spilled water inside the case, in addition to a cover over the drain on the outside to protect it from backfill.
- With a removable riser pipe, the bottom case can be capped off, allowing the grass to be mowed right over the top and it also improves appearance of landscape.
- Outlet ball valve included, **a sprinkler can easily be added for outlet.**



No Lead



## RATINGS:


- Max Pressure: 80 PSI
- Maximum Temperature: 120°F

## CERTIFICATIONS:

- ASSE1011

MATERIALS LIST	
Part Name	Material
Bottom Case	Schedule 40 PVC
Inlet Bushing	PVC
Stop Valve	PVC
Stand Pipe	Schedule 80 PVC
Centering Collar	Plastic
Top Cap	Plastic
Ball Valve	PVC

DIMENSIONS				
Part No.	Bury Depth	Overall Length	Width	Approx. Wt./Lbs.
HIDET27501	1'	22"	4"	1.8
HIDET27502	2'	34"	4"	2.5
HIDET27503	3'	46"	4"	3.3
HIDET27504	4'	58"	4"	4.0
HIDET27505	5'	70"	4"	4.8
HIDET27506	6'	82"	4"	5.5
HIDET27507	7'	94"	4"	6.3
HIDET27508	8'	106"	4"	7.0

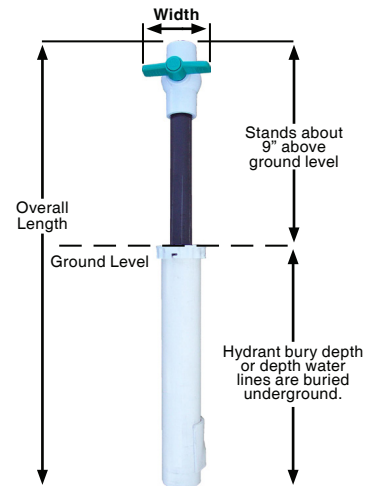

**APPROVED AS A SANITARY HYDRANT**  
Approved by states that require approval for sanitary hydrants, including: Illinois, Indiana, Michigan, Ohio, and Wisconsin.



315 Flindt Drive P.O. Box 392  
Storm Lake, Iowa 50588-0392 U.S.A.  
[merrillmfg.com](http://merrillmfg.com)

(800) 831-6962  
(712) 732-2760  
Fax No. 1-800-ANYFLOW